

FIRE RATED ACCESS PANEL

1hr fire rated plasterboard ceiling access panel

DESCRIPTION

Hinged access panel installed into a steel framed plasterboard ceiling with a -/60/60 fire rating.

APPLICATIONS

Shops, offices, apartments and any application where access needs to be achieved through a plaster lined ceiling without affecting the fire rating of the ceiling.

FEATURES

- Flush mounted or recess mounted
- Continuous steel piano hinge
- MDF facing as standard, or optional steel facing available
- Latched with either Bowman's cam-action or Budget lock
- 48mm thick
- Integrated hot temperature smoke / fire seals


MODELS

Model	FRL	Thickness (mm)	Max Size (mm)
PCAP-CPS03	-/60/60	48	600 x 600

HOW TO SPECIFY

"Eg. Access panel to be a Pyropanel fire rated plasterboard ceiling access panel PCAP-CPS03, -/60/60, MDF face*, with a Budget lock* and continuous hinges*".

* denotes example - delete, change or specify as required

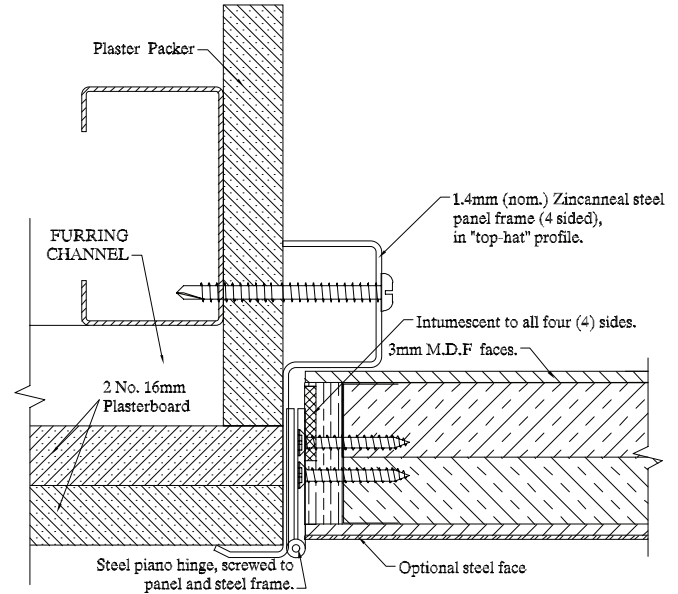

Ceiling panel with continuous hinges